ASBESTOS-CONTAINING FLOOR TILE AND MASTIC

GENERAL NOTES

1. ASBESTOS-CONTAINING MATERIALS ARE PRESENT IN ACCESSIBLE AND INACCESSIBLE INTERSTITIAL SPACES THROUGHOUT THIS BUILDING.
2. ALL CONTRACTORS PERFORMING DEMOLITION ACTIVITIES ARE TO COMPLY WITH ALL APPLICABLE LEAD REGULATIONS IN OAR 437-DIVISION 3, 1926.62 AND SECTION 02 83 19 OF THE SPECIFICATIONS.
3. CONTRACTOR IS TO COORDINATE ALL ABATEMENT ACTIVITIES WITH CONSTRUCTION MANAGER/GENERAL CONTRACTOR INCLUDING BUT NOT LIMITED TO: SCHEDULING, PHASING, ACCESS, AND SECURITY, POWER AND WATER NEEDS, PROTECT AND SAVE ITEMS, LOCKOUT/TAGOUT PROCEDURES AND SITE SAFETY REQUIREMENTS.
4. THIS DRAWING IS DIAGRAMMATIC AND SHOULD BE USED FOR GENERAL MATERIAL INFORMATION AND SAMPLE LOCATIONS ONLY. CONTRACTOR IS TO FIELD VERIFY ALL MATERIAL LOCATIONS AND QUANTITIES.

ABATEMENT NOTES

1. ASBESTOS-CONTAINING BUILT-UP ROOFING, MASTIC, AND SHEATHING TO BE REMOVED FROM THROUGHOUT BUILDING.
2. ASBESTOS-CONTAINING ROOFING DEBRIS GENERATED DURING ROOFING REMOVAL TO BE CONTAINED AND REMOVED.
3. APPROXIMATELY 35 LEAD-CONTAINING VENT PIPE CAPS TO BE REMOVED.

KEY NOTES

(1) DOOR WITH ASBESTOS-CONTAINING CAULK TO BE REMOVED.

LEGEND

WINDOWS WITH ASBESTOS-CONTAINING CAULK TO BE REMOVED

ASBESTOS SAMPLE SYMBOLS

007 — DRAWING REFERENCE TO BULK SAMPLE FIELD CODE, SEE INVENTORY OF SAMPLES
MATERIAL SYMBOL

NOT TESTED	NEGATIVE -	POSITIVE +	
○	⊖	●	THERMAL SYSTEM INSULATION
□	⊟	■	SURFACING MATERIAL
◇	◇	◆	MISCELLANEOUS MATERIAL

INVENTORY OF ASBESTOS SAMPLES

DRAWING REFERENCE	FIELD CODE	LAB RESULT	MATERIAL SAMPLED
◆032	23514.174-0032	(-/-/-/-/-/-/+/+/+)	BUILT-UP ROOFING
◆033	23514.174-0033	(-/-/-/-/-/+/+/-/-/+)	BUILT-UP ROOFING
◇034	23514.174-0034	(-)	
◇036	23514.174-0036	(-/-/-/-/-/-/-/-)	BUILT-UP ROOFING
◇037	23514.174-0037	(-)	MASTIC
◆038	23514.174-0038	(+)	MASTIC

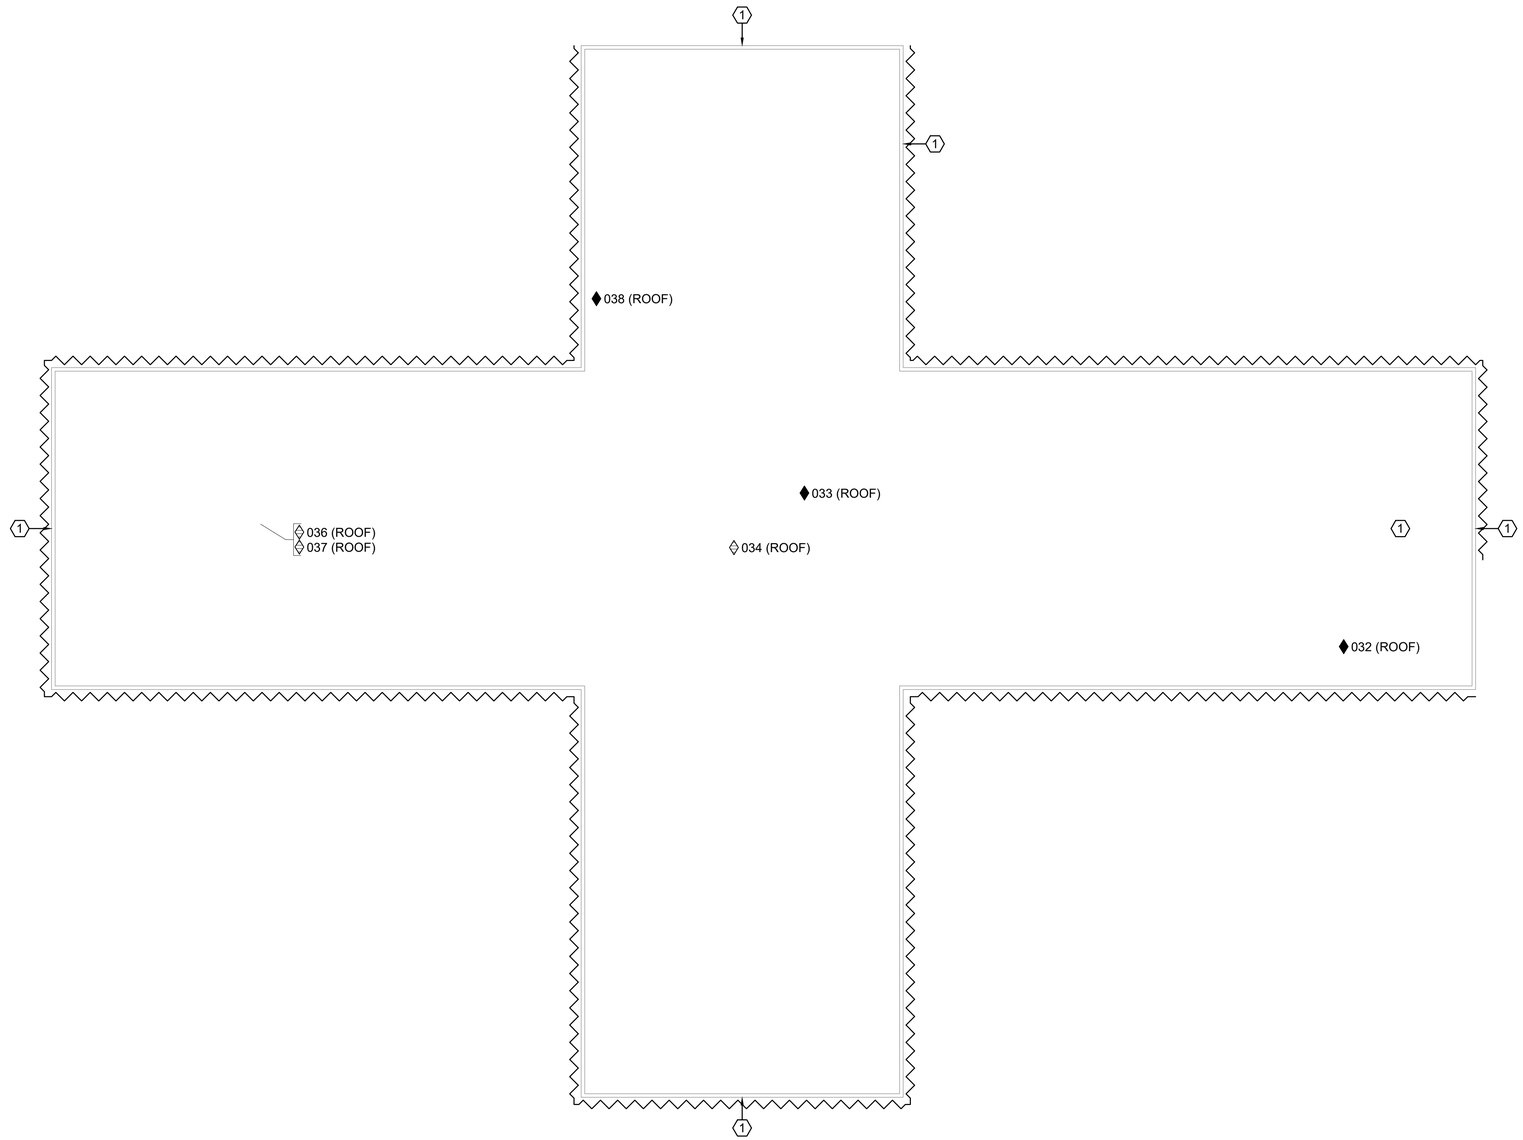

ROOF PLAN - BUILDING "F"

SCALE: 1" = 10'
0 5' 10' 20'

PREPARED FOR: PORTLAND PUBLIC SCHOOLS

FULL SIZE SHEET FORMAT IS 24X36; IF PRINTED SIZE IS NOT 24X36, THEN THIS SHEET FORMAT HAS BEEN MODIFIED & INDICATED DRAWING SCALE IS NOT ACCURATE.

PBS Engineering and Environmental Inc.
4412 Cornell Avenue
Portland, OR 97239
503.248.1939
pbsusa.com

HAZARDOUS MATERIAL ABATEMENT PLAN
EDGEFIELD SITE
2345 NE 244TH AVENUE, WOOD VILLAGE, OREGON

NO	REVISION	DATE	BY	APPD

DRAWN BY: JAB
CHECKED: JMc
DATE: APRIL 2021
PROJECT NUMBER: 23514.174
SHEET DRAWING NO: HA2
SHEET 2 OF 3

Filename: L:\Projects\2300\2350-2399\23514_ReynoldsSD\23514.174_Edgefield\DWG\hazmat_design\23514.174_HA2.dwg Layout Tab: 11X17 User: Jim Blanco CAD Plot Date/Time: 4/12/2021 11:11:05 AM